HANDI-MOVE MODEL 2420/2430

WALL LIFT



A versatile solution for many situations.



- Portable lifting device
- Wall or floor mounted
- Easy to remove and re-use
- Perfect for areas where access is restricted
- Accommodates both the body support and conventional slings
- Extendible boom arm
- Rotating range 180°
- An economical solution



Handi-Move INTERNATIONAL

TECHNICAL SPECIFICATIONS



THREE POSSIBILITIES FOR FIXATION

Mounted on wall plate(s)

Mounted on standing support(s)

Wall plate + extension for a larger range








DIMENSIONS AND SPECIFICATIONS

- Actuator directly on the mains power with pneumatic handcontrol
- Actuator on 24 V DC transformer with emergency power facilities and electric handcontrol

Safe working load	145 kg	
Wall plate	width	140 mm
	height	687 mm
Standing support	outside dimensions	80 x 50 mm
	max. height	3000 mm
Boom arm	extendible	
Weight	16 kg	
Safety mechanism	built-in	

LIFING RANGE

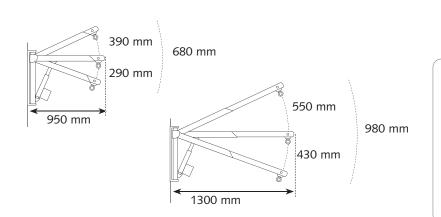

For free demonstration or further information :

© 2010 Handi-Move V2